

# Lecture 02: Discrete Time Domain Analysis

John Chiverton

School of Information Technology  
Mae Fah Luang University

1st Semester 2009/ 2552

# Outline

## Overview

### Lecture Contents

## Describing Digital Signals

### Types of digital signal

## Digital LTI Processors

### Linear Time Invariant Systems

### Impulse Response

## Digital Convolution

## Digital Cross-Correlation

## Difference Equations

## Lecture Summary

# Lecture Contents

## Overview

Lecture Contents

## Describing Digital Signals

Types of digital signal

## Digital LTI Processors

Linear Time Invariant Systems

Impulse Response

## Digital Convolution

## Digital Cross-Correlation

## Difference Equations

## Lecture Summary

# Outline

## Overview

Lecture Contents

## Describing Digital Signals

Types of digital signal

## Digital LTI Processors

Linear Time Invariant Systems

Impulse Response

## Digital Convolution

## Digital Cross-Correlation

## Difference Equations



## Lecture Summary

# Unit Impulse Function





- ▶ Unit impulse function is a fundamental function in Digital Signal Processing (DSP)
- ▶ Symbol of Unit impulse function is the *Greek delta*:  $\delta$
- ▶  $\delta(n) = 1$  if  $n = 0$ , so that,

$$\delta(n - v) = \begin{cases} 1 & \text{if } (n - v) = 0, \\ 0 & \text{otherwise.} \end{cases}$$

## ▶ Examples



# Unit Impulse Function *examples cont'd.*



# Scaling Unit Impulse Function


- ▶ Can scale unit impulse with any value, *i.e.*

$$g \times \delta(n - v) = \begin{cases} g & \text{if } n - v = 0, \\ 0 & \text{otherwise.} \end{cases}$$


- ▶ So if  $g$  is a function, such as  $g(n)$  then

$$g(n)\delta(n - v) = \begin{cases} g(n) & \text{if } n - v = 0, \\ 0 & \text{otherwise.} \end{cases}$$

- ▶ This is useful for something called *sifting*
- ▶ Given a signal  $g(n)$ :

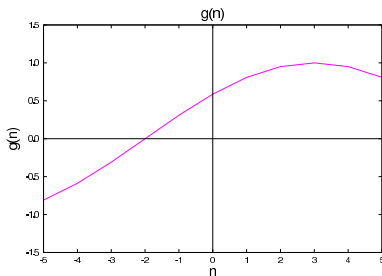


- Calculate  $g(n)\delta(n - v)$  for all values of  $v$ , i.e.

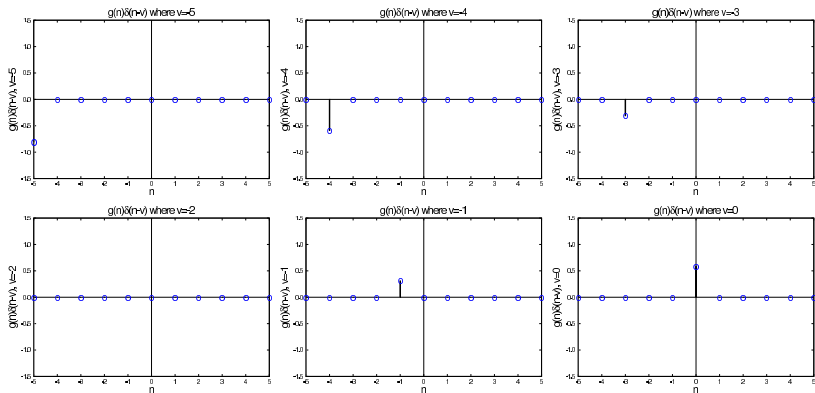




# Sifting *cont'd.*

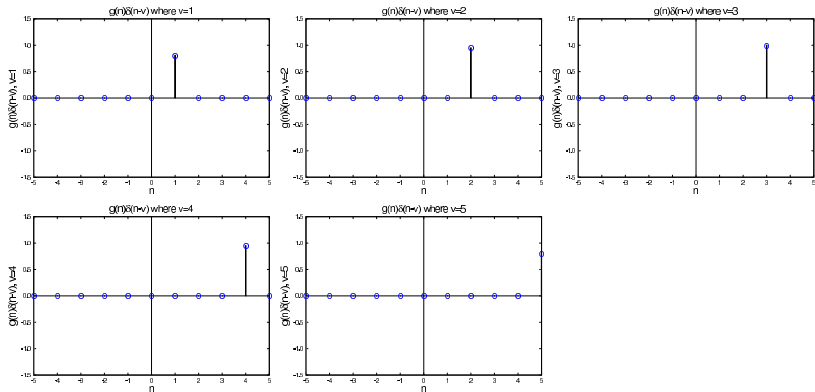

► We can now add all these together...

## Sifting *cont'd.*

- ▶ Adding all the delta values together we get

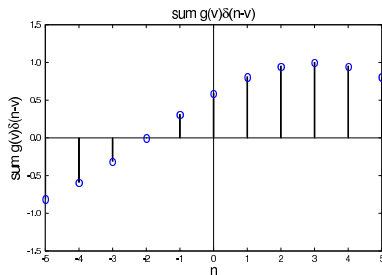

- ▶ which is a discrete (*sifted*) representation of the original signal,  $g(n)$ .
- ▶ This process can be represented by

$$x[n] = \dots + g(-5)\delta(n+5) + g(-4)\delta(n+4) + \dots + g(4)\delta(n-4) + g(5)\delta(n-5) + \dots$$

- ▶ where  $[\cdot]$  signifies a discrete formulation. This can be shortened to



$$x[n] = \sum_{k=-\infty}^{\infty} g(k)\delta(n-k). \text{ For our case } x[n] = \sum_{k=-5}^5 g(k)\delta(n-k).$$

# Unit Step Function





- ▶ The unit step function:

$$u[n - v] = \begin{cases} 1 & \text{if } n - v \geq 0, \\ 0 & \text{otherwise.} \end{cases}$$

- ▶ switches from zero to unit value.
- ▶ *Examples*



# Unit Step Function Examples cont'd.



# Unit Step Function

- ▶ It can be defined using the unit impulse function ( $\delta[n - v]$ ):

$$u[n - v] = \sum_{m=-\infty}^{\infty} \delta[m - v]$$

- ▶ Also

$$\delta[n - v] = u[n - v] - u[n - 1 - v].$$

- ▶ These are known as *recurrence* formula, where the current signal value is dependent on previous signal values:

*“to recur”*


Meaning: to repeat.

# Ramp Function

- ▶ Another interesting function type is the ramp function.
- ▶ Given by

$$r[n - v] = (n - v)u[n].$$

*Example*

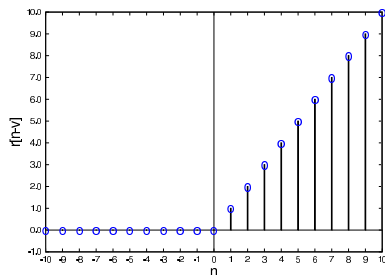

# Digital Sine and Cosine Functions

- ▶ Digital sine wave:


$$x[n] = a \sin(n\Omega + \theta)$$

- ▶ Digital cosine wave:

$$x[n] = a \cos(n\Omega + \theta)$$

- ▶  $\Omega$  is the *digital "frequency"* measured in *radians*
- ▶ 1 cycle every  $N$  samples. Also  $\Omega = 2\pi/N$  so that  $N = 2\pi/\Omega$

- ▶ *Example*  $a = 0.75$ ,  $\theta = 0$  and  $\Omega = \pi/8$ , therefore  $N = 2 \times 8 = 16$   
i.e.  $x[n] = 0.75 \sin(n\pi/8)$ :

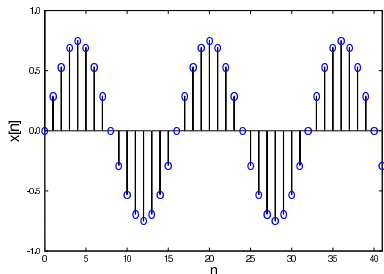

# Comparison with Analog Sine Function

- ▶ Compare to a continuous analog sine wave:

$$x(t) = a \sin(t\omega + \theta)$$

where  $t$  could be time in seconds and  $\omega = 2\pi f$  is the angular frequency, therefore in *radians per second*.

- ▶ The interval between each sample  $n$  is  $T_s$  seconds, so there is a sample at every  $t = nT_s$  seconds
- ▶ The continuous sine wave can then be written as

$$x(n) = a \sin(nT_s 2\pi f + \theta)$$

- ▶ If we equate the continuous and digital versions, then

$$x[n] = x(n)$$

$$a \sin(n\Omega + \theta) = a \sin(nT_s 2\pi f + \theta)$$

- ▶ Therefore  $\Omega = T_s 2\pi f$  or if sampling frequency is  $f_s = 1/T_s$  then  $\Omega = 2\pi f/f_s$ .



# Outline

## Overview

Lecture Contents

## Describing Digital Signals

Types of digital signal

## Digital LTI Processors

Linear Time Invariant Systems

Impulse Response


## Digital Convolution

## Digital Cross-Correlation

## Difference Equations

## Lecture Summary

# Linear Time Invariant Systems



- ▶ **Time Invariance:**

- ▶ The same response to the same input at any time. e.g.  
If  $y[n + v] = x[n + v]$  for any value of  $v$ .

- ▶ **Linear System:**


- ▶ *Principle of Superposition:*
  - ▶ If the input consists of a sum of signals then the output is the sum of the responses to those signals, e.g.

If the output of a system is  $y_1[n]$  and  $y_2[n]$  in response to two different inputs  $x_1[n]$  and  $x_2[n]$  respectively then the output of the same system for the two inputs weighted and combined i.e.  $ax_1[n] + bx_2[n]$  will be  $ay_1[n] + by_2[n]$  where  $a$  and  $b$  are constants.

# Linear Time Invariant Systems

- ▶ A Linear Time Invariant (LTI) system consists of:

- ▶ Storage / Delay:



- ▶ Addition / Subtraction: e.g.  $y[n] = x[n] + x[n - 1]$




- ▶ Multiplication by Constants: e.g.  $y[n] = \frac{1}{3}x[n]$



- ▶ Example

Moving average filter,  $y[n] = \frac{x[n] + x[n-1] + x[n-2]}{3}$

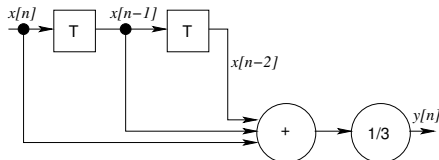

# Other System Properties

An LTI system is

- ▶ Associative, where a system can be broken down into simpler subsystems for analysis or synthesis
- ▶ Commutative, where if a system is composed of a series of subsystems then the subsystems can be arranged in any order


LTI systems may also have

- ▶ Causality: output does not depend on future input values
- ▶ Stability: output is bounded for a bounded input (see Lecture 04)
- ▶ Invertibility: input can be uniquely found from the input (e.g. the square of a number is not invertible)
- ▶ Memory: output depends on past input values

# Impulse Response

An LTI system possesses an Impulse Response which characterizes the system's output if an impulse function is applied to the input.

## *Example Impulse Response*

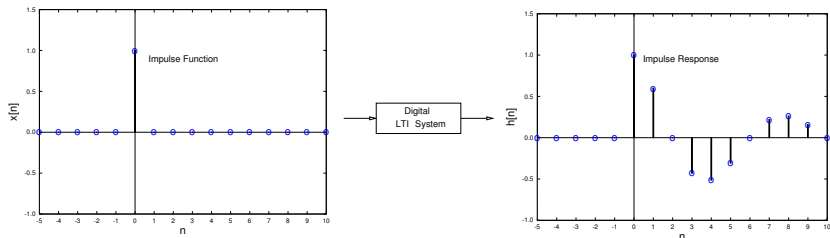

# Impulse Response Example

Remember the moving average filter:

$$y[n] = \frac{1}{3}(x[n] + x[n-1] + x[n-2])$$

If the input is the impulse function:  $x[n=0] = \delta(0)$ , then  $y[n]$  is the output in response to an impulse function, *i.e.* the **impulse response** hence  $h[n] = y[n]$ ...

At time  $n = -1$ :

$$x[n=-1] = \delta[-1] = 0;$$


$$\text{At time } n = 0: x[n=0] = \delta[0] = 1;$$

$$\text{At time } n = 1: x[n=1] = \delta[1] = 0$$

*etc.*


Therefore

- ▶  $h[n < 0] = y[n < 0] = 0$
- ▶  $h[0] = y[0] = \frac{1}{3}(\delta[0] + \delta[-1] + \delta[-2]) = \frac{1}{3}$
- ▶  $h[1] = y[1] = \frac{1}{3}(\delta[+1] + \delta[0] + \delta[-1]) = \frac{1}{3}$
- ▶  $h[2] = y[2] = \frac{1}{3}(\delta[+2] + \delta[+1] + \delta[0]) = \frac{1}{3}$
- ▶  $h[n > 2] = y[n > 2] = 0$

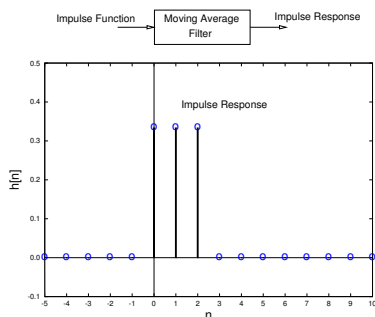

# Impulse Response Examples - shifting

The impulse response can also be determined for a shifted impulse function, i.e.  $\delta[n - v]$

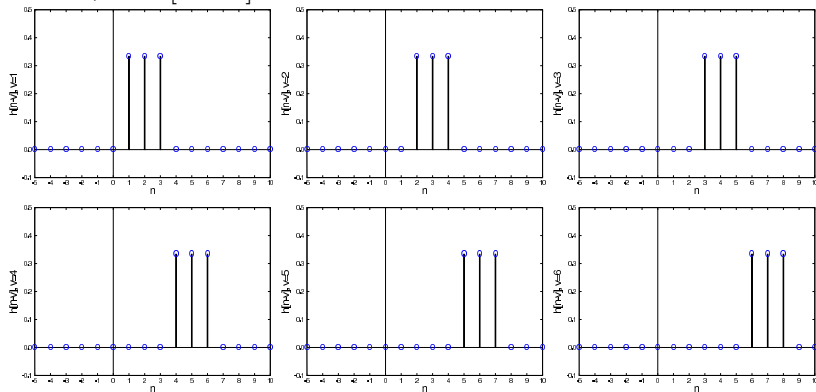

What will the system output ( $y[n]$ ) be if the input consists of more than one impulse function shifted by different amounts?

## System Response to Multiple Shifted Impulse Responses

What will the system output ( $y[n]$ ) be if the input consists of more than one impulse function shifted by different amounts?

Remember that all LTI systems obey the “*Principle of Superposition*”...

So, for the inputs

$$x_1[n] = a\delta[n] \text{ and } x_2[n] = b\delta[n - 1],$$

where  $a$  and  $b$  are constants, the corresponding outputs will be

$$y_1[n] = ah[n] \text{ and } y_2[n] = bh[n - 1],$$

*i.e.* impulse responses. Therefore if

$x[n] = x_1[n] + x_2[n] = a\delta[n] + b\delta[n - 1]$  then

$$y[n] = ah[n] + bh[n - 1].$$




## Other System Inputs: Step Function

- ▶ The discrete step function can be thought of as a series of impulse functions (remember sifting).
  - ▶ Each impulse function creates an impulse response.
  - ▶ The output is then the joint response of all the impulse responses scaled by the inputs.
- 
- ▶ A discretely sampled step input (starting at  $n = 0$ ) is given by:

$$x[n] = \sum_{k=0}^{\infty} \delta(n - k).$$

- ▶ Therefore, using the *Principle of Superposition* we get

$$y[n] = \sum_{k=0}^{\infty} h(n - k).$$

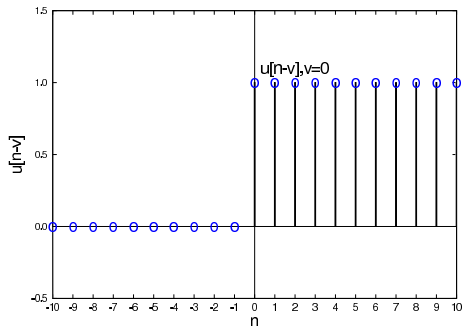


# Moving Average of a Step Function

Moving average (with  $k = 3$ ) has an impulse response:

- ▶  $h[n < 0] = y[n < 0] = 0$
- ▶  $h[0] = y[0] = \frac{1}{3}(\delta[0] + \delta[-1] + \delta[-2]) = \frac{1}{3}$
- ▶  $h[1] = y[1] = \frac{1}{3}(\delta[+1] + \delta[0] + \delta[-1]) = \frac{1}{3}$
- ▶  $h[2] = y[2] = \frac{1}{3}(\delta[+2] + \delta[+1] + \delta[0]) = \frac{1}{3}$
- ▶  $h[n > 2] = y[n > 2] = 0$

Moving average of a step function is then:

$$y[n] = \sum_{k=0}^{\infty} h(n-k)$$
$$= \begin{cases} 0 & \text{if } n \leq 0 \\ 1/3 & \text{if } n = 0 \\ 2/3 & \text{if } n = 1 \\ 1 & \text{if } n \geq 2 \end{cases}$$

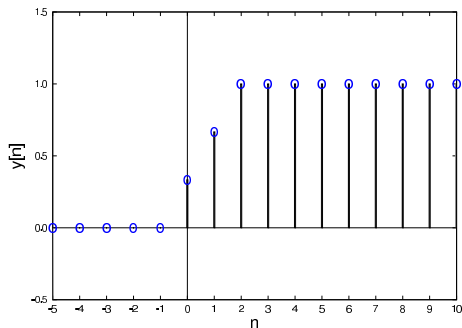

# Scaled Impulse Function Inputs

What happens when the step function is given by:

$$u[n - v] = \begin{cases} a & \text{if } n - v \geq 0, \\ 0 & \text{otherwise} \end{cases} ?$$

The discrete impulse function version is

$$x[n] = \sum_{k=0}^{\infty} a\delta[n - k].$$



Using the *Principle of Superposition*:

$$y[n] = \sum_{k=0}^{\infty} ah[n - k].$$

*Example* Moving average filter,  
 $k = 3$

$$y[n] = \begin{cases} 0 & \text{if } n \leq 0 \\ a/3 & \text{if } n = 0 \\ 2a/3 & \text{if } n = 1 \\ a & \text{if } n \geq 2 \end{cases}$$

*Example* Moving Average and  $a = 0.7$



# Outline

## Overview

Lecture Contents

## Describing Digital Signals

Types of digital signal

## Digital LTI Processors

Linear Time Invariant Systems

Impulse Response

## Digital Convolution

## Digital Cross-Correlation

## Difference Equations

## Lecture Summary

# Digital Convolution

What happens if the scale of the input impulse functions ( $a$ ) varies with  $n$ ? *i.e.*

$$x[n] = a[n]\delta[n - k].$$

Using the *Principle of Superposition* we get

$$y[n] = \sum_{-\infty}^{\infty} a[k]h[n - k].$$

This is known as the **Convolution Sum**.

*Example*

$$x[n] = \begin{cases} 0 & \text{if } n \leq 0 \\ a[0] & \text{if } n = 1 \\ a[1] & \text{if } n = 2 \\ 0 & \text{if } n \geq 3 \end{cases},$$

which is the same as  $x[n] = a[0]\delta[n - 1] + a[1]\delta[n - 2]$ . Then

$$y[n] = a[0]h[n - 1] + a[1]h[n - 2].$$

## Digital Convolution *Example*

Q. Find  $y[n]$  if  $a[0] = 1$  and  $a[1] = 2$  using the impulse response of the moving average filter,  $k = 3$ .

A.

$$y[n] = a[0]h[n] + a[1]h[n - 1] = h[n] + 2h[n - 1]$$

$$y[-1] = h[-1] + 2h[-2] = 0 + 0 = 0$$

$$y[0] = h[0] + 2h[-1] = 1/3 + 0 = 1/3$$

$$y[1] = h[1] + 2h[0] = 1/3 + 2/3 = 1$$

$$y[2] = h[2] + 2h[1] = 1/3 + 2/3 = 1$$

$$y[3] = h[3] + 2h[2] = 0 + 2/3 = 2/3$$

$$y[4] = h[4] + 2h[3] = 0 + 0 = 0$$

# Digital Convolution Trivia

Convolution is often represented by an asterik:

$$y[n] = \sum_{-\infty}^{\infty} a[k]h[n - k] = a[n] * h[n]$$

Convolution is commutative:

$$\begin{aligned} y[n] &= a[n] * h[n] = h[n] * a[n] \\ &= \sum_{-\infty}^{\infty} h[k]a[n - k]. \end{aligned}$$

Convolution is associative: *cascaded systems*

$$\{x[n] * h_1[n]\} * h_2[n] = x[n] * \{h_1[n] * h_2[n]\}$$

Convolution is distributive: *systems in parallel*

$$x[n] * \{h_1[n] + h_2[n]\} = x[n] * h_1[n] + x[n] * h_2[n]$$

# Digital Convolution Example

Original signal: (1 cycle every 104 samples)

$$x_1[n] = \sin(n\pi/52)$$

Noise signal: (1 cycle every 4 samples)


$$x_2[n] = \sin(n\pi/2).$$

Input signal:

$$x[n] = x_1[n] + x_2[n].$$

Moving average filter,  $k = 20$ :

$$y[n] = \frac{1}{20} \sum_{k=0}^{k=19} x[n - k].$$

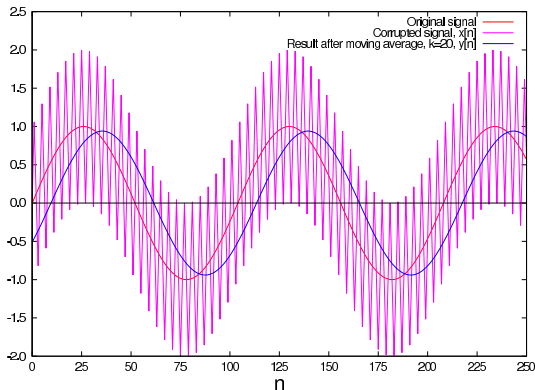



# Outline

## Overview

Lecture Contents

## Describing Digital Signals

Types of digital signal

## Digital LTI Processors

Linear Time Invariant Systems

Impulse Response

## Digital Convolution

## Digital Cross-Correlation

## Difference Equations

## Lecture Summary

# Digital Cross-Correlation

Cross-correlation can be used to compare 2 signals.

- ▶ If  $x_1[n]$  and  $x_2[n]$  are two signals then digital cross-correlation is defined:

$$y[l] = \sum_{m=-\infty}^{\infty} x_1^*[m]x_2[n + m]$$

where  $x_1^*[n]$  is the complex conjugate of  $x_1[n]$ .

- ▶ For a real signal  $x_1^*[n] = x_1[n]$ .
- ▶  $l$  is the *lag*.
- ▶ If  $x_1[n]$  and  $x_2[n]$  are the same signal but with a delay between them, then  $y[l]$  is at a maximum when  $l$  is equal to this delay.

## Digital Cross-Correlation Example

**Q.** Given  $x_1 = (0 \ 0 \ 0.5 \ 0.7 \ 0)^T$  and  $x_2 = (0 \ 0.5 \ 0.7 \ 0 \ 0)^T$ . Calculate the cross-correlation for these two real signals.

**A.** Cross correlation for a real signal is:

$$y[l] = \sum_{m=-\infty}^{\infty} x_1[m]x_2[n+m].$$

There are 5 elements in these vectors so (changing the limits):

$$y[l] = \sum_{m=0}^4 x_1[m]x_2[n+m].$$

We can then calculate the results. Some example calculations:

$$\begin{aligned} y[l=0] &= \overbrace{x_1[0] \times x_2[0]}^{l=0,m=0} + \overbrace{x_1[1] \times x_2[1]}^{l=0,m=1} + x_1[2] \times x_2[2] + x_1[3] \times x_2[3] + \overbrace{x_1[4] \times x_2[4]}^{l=0,m=4} \\ &= 0 \times 0 + 0 \times 0.5 + \underline{0.5 \times 0.7} + 0.7 \times 0 + 0 \times 0 = \underline{0.5 \times 0.7} = 0.35 \end{aligned}$$

$$\begin{aligned} y[l=1] &= \overbrace{x_1[0] \times x_2[0+1]}^{l=1,m=0} + \overbrace{x_1[1] \times x_2[1+1]}^{l=1,m=1} + x_1[2] \times x_2[2+1] + \\ &\quad \overbrace{x_1[3] \times x_2[3+1]}^{l=1,m=4} + \overbrace{x_1[4] \times x_2[4+1]}^{l=1,m=4} \\ &= 0 \times 0.5 + 0 \times 0.7 + 0 \times 0 + 0 \times 0 + 0 \times 0 = 0 \end{aligned}$$

## Digital Cross-Correlation *Example cont'd.*

Here are the results for each combination of  $l$  and  $m$  values:


$l$	$m$ <b>0</b>	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	$y[l]$
<b>-5</b>	0	0	0	0	0	0
<b>-4</b>	0	0	0	0	0	0
<b>-3</b>	0	0	0	0	0	0
<b>-2</b>	0	0	0	0.35	0	0.35
<b>-1</b>	0	0	0.25	0.49	0	0.74
<b>0</b>	0	0	0.35	0	0	0.35
<b>1</b>	0	0	0	0	0	0
<b>2</b>	0	0	0	0	0	0
<b>3</b>	0	0	0	0	0	0
<b>4</b>	0	0	0	0	0	0

*PEAK*


- ▶ A peak at  $l = -1$ .
- ▶  $l$  is the *lag*, so there is a lag of  $-1$ .
- ▶ This means  $x_1$  has some similar signal as  $x_2$  but lagged by 1 step.
- ▶ We can also see from the signal definitions  $x_1 = (0 \ 0 \ 0.5 \ 0.7 \ 0)^T$  and  $x_2 = (0 \ 0.5 \ 0.7 \ 0 \ 0)^T$  that  $x_1[n - 1] = x_2[n]$ .

# Digital Cross-Correlation *Example cont'd.*


$$x_1[n] =$$

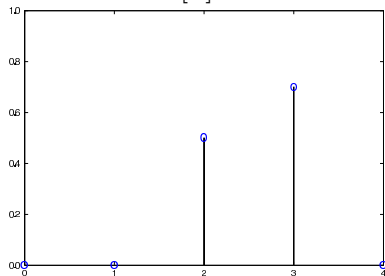

$$x_2[n] =$$

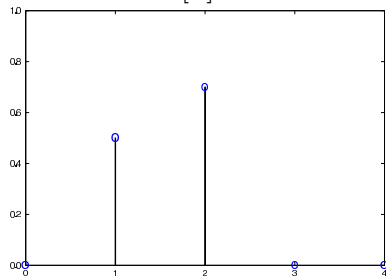

The result of the digital cross-correlation,  $y[l] =$

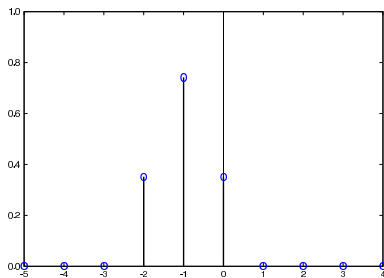

# Outline

## Overview

Lecture Contents

## Describing Digital Signals

Types of digital signal

## Digital LTI Processors

Linear Time Invariant Systems

Impulse Response

## Digital Convolution

## Digital Cross-Correlation

## Difference Equations

## Lecture Summary

# Difference Equations

Difference equations are the name given to the equations that describe the digital signals and systems. For example the equation for the moving average filter with  $k = 3$ :

$$y[n] = \frac{x[n] + x[n - 1] + x[n - 2]}{3}$$

is known as a difference equation.

Difference equations for LTI systems can always be put in the form:

$$\sum_{m=0}^N a[m]y[n - m] = \sum_{m=0}^M b[m]x[n - m].$$

So for our moving average filter:

- ▶  $M = 2$  and  $N = 0$ .
- ▶  $a[m]$  and  $b[m]$  are known as coefficients.
- ▶ For the moving average output  $y$  there is only one coefficient,  $a[0] = 1$ .
- ▶ For the moving average input  $x$ , there are three coefficients  $b[0] = b[1] = b[2] = \frac{1}{3}$ .

# Outline

## Overview

Lecture Contents

## Describing Digital Signals

Types of digital signal

## Digital LTI Processors

Linear Time Invariant Systems

Impulse Response

## Digital Convolution

## Digital Cross-Correlation

## Difference Equations

## Lecture Summary



# Lecture Summary

Today we have covered

- ▶ Types of digital signal, e.g. unit impulse function
- ▶ Sifting
- ▶ Digital sine and cosine functions
- ▶ Linear time invariant (LTI) systems
- ▶ Impulse response
- ▶ Moving average of a step function
- ▶ Digital convolution
- ▶ Digital cross-correlation
- ▶ Generalized difference equation for LTI systems